

ROTAN® PD

Internal Gear Pump for Petrochemical Duty



ROTAN® PD

- Designed for refinery and petrochemical applications. All pressurecontaining components are in carbon steel.
- Design pressure according to ANSI 150 Lbs or Pn20.
- Meet meet API 676 4th edition material standards with a few exceptions.
- Capacity range up to 250 m³/h / 1100 gpm.
- Available with 90° angular configurations.

Options:

- Different shaft seal solutions: Gland packing, single or double mechanical seal, component seal or cartridge seal (single or tandem, back-to-back arrangement)
- Heating jacket, front and back
- Bushing material

Capacity Range	Up to 250 m ³ /h / 1100 gpm
Speed	Up to 1750 rpm
Differential Pressure	Up to 16 bar / 232 psi
Suction Lift	Up to 0,5 bar / 7,25 psi vacuum while priming Up to 0,8 bar / 11,6 psi vacuum while pumping
Viscosity Range	Up to 250,000 cSt
Temperature	Up to 250°C / 482°F
Pumping of: Fuel, Oil, Gasoline, Lube oil, Grease, Other hydrocarbon based fluids, Additives, Bitumen, Polystyrene, Wax	

Selection of Pump size

PLEASE NOTE!

ED: Capacity curve up to 151

GP: Capacity curve up to 101

To select the pump size with this table, you should only know:


- The capacity
- The viscosity

We start at the top of the table with the viscosity, and draw a line down, staying within the colour of the selected viscosity range (see example).

Then we start at the right of the table, drawing a horizontal line starting with the required capacity (see example).

The point where these two lines meet determines the pump size, defined by the diagonal lines in the table. If you do not hit one of these pump lines exactly, increase the capacity a bit. The speed is found vertically below the point of intersection (see example).

The maximum speed of each pump is found vertically below the end of each pump line (indicated with the small black dot). This maximum speed must be reduced to max. 50% when pumping strongly abrasive liquids or emulsions.

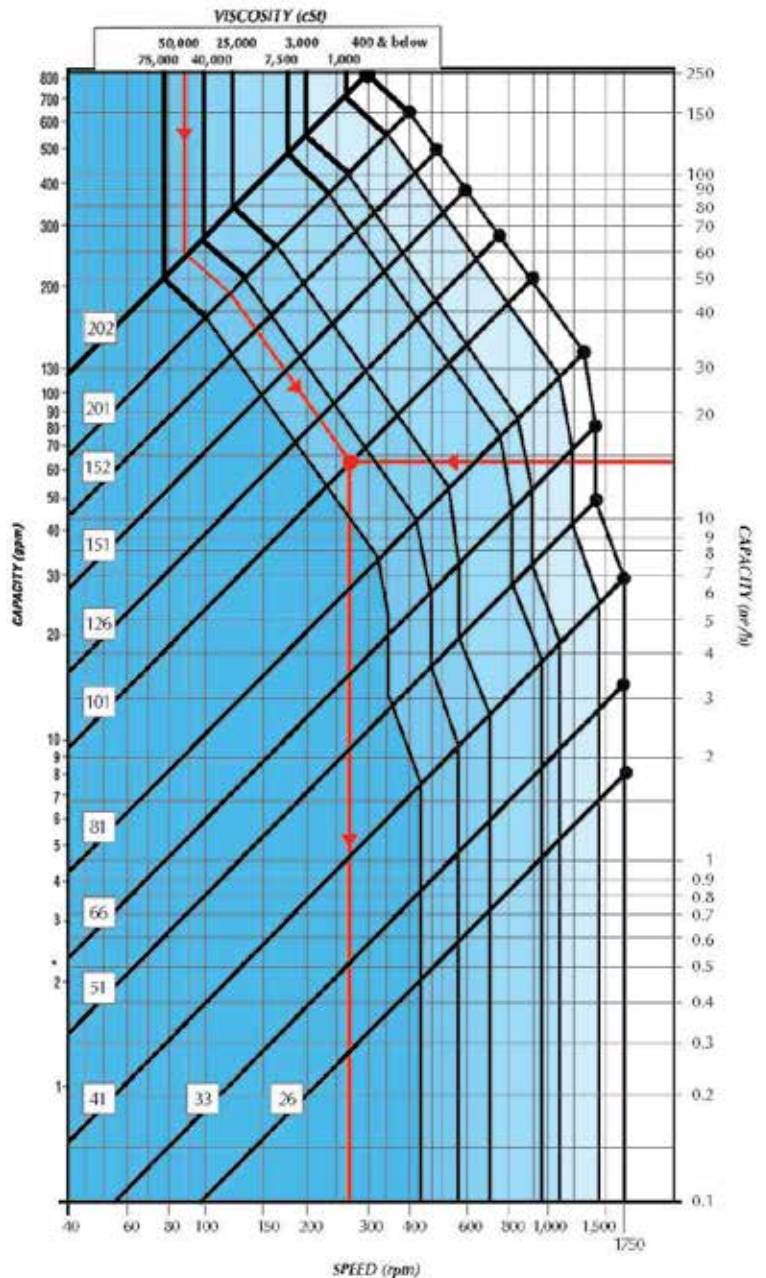

When the differential pressure is known, the shaft power is calculated by:

$$E(KW) = 0,07 \times \text{flow (m}^3/\text{h)} \times \text{differential pressure (bar)}$$

The requested shaft power has to be increased by up to 35% when using a small ROTAN® pump in combination with high viscosity (Over 10,000 cSt).

The requested shaft power has to be decreased by up to 35% when using a big ROTAN® pump in combination with low viscosity (Under 500 cSt).